


Summary Specification

"The name trusted in roofing since 1906"



APP TORCH

20 – Year Material or System Warranty Non-Insulated Nailable Deck

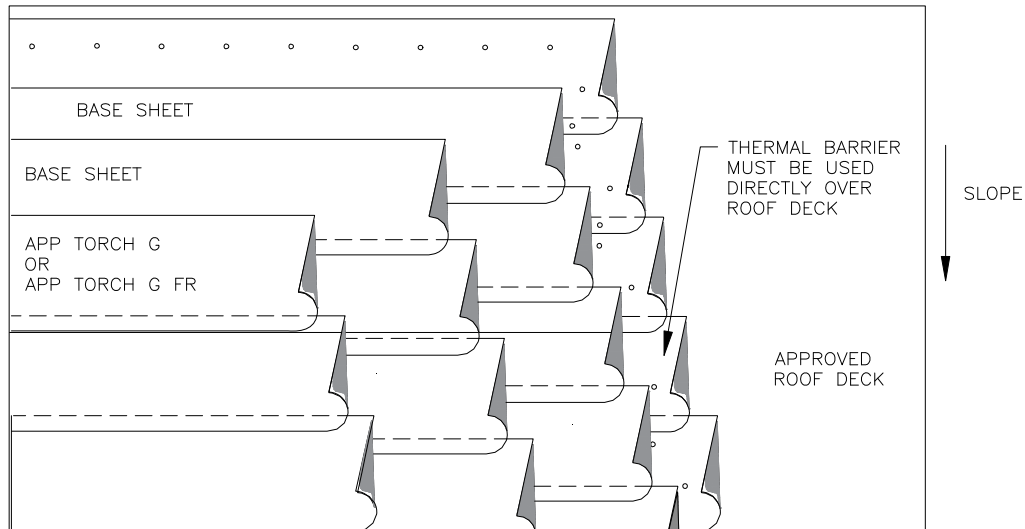

Deck Requirement	Insulation	Cover Board		
<ul style="list-style-type: none"> Min 15/32" Plywood⁽¹⁾ Min 7/16" OSB⁽¹⁾ Min. 1" Wood Plank⁽¹⁾ 	<ul style="list-style-type: none"> None 	<ul style="list-style-type: none"> Min. 1/4" Dens Deck Prime Min. 1/4" Securock 		
Lightweight <ul style="list-style-type: none"> Insulation Concrete over Metal⁽²⁾ 	<th>Base Sheet⁽⁴⁾</th> <td> <th>Thermal Barrier</th> </td>	Base Sheet ⁽⁴⁾	<th>Thermal Barrier</th>	Thermal Barrier
<ul style="list-style-type: none"> Gypsum⁽²⁾ 	<ul style="list-style-type: none"> APP Torch Base SA Base⁽³⁾ SA Base FR⁽³⁾ 	<ul style="list-style-type: none"> G2 Base mechanically attached Nail Base mechanically attached 		
<ul style="list-style-type: none"> Cementitious Wood Fiber⁽²⁾ 	<th>Cap Sheet</th> <td> <th>Slope Requirement</th> </td>	Cap Sheet	<th>Slope Requirement</th>	Slope Requirement
	<ul style="list-style-type: none"> APP Torch G APP Torch G FR 	1/4" per foot		

Summary Specification

"The name trusted in roofing since 1906"



Notes:

1. Space below roof deck must be vented if area below roof is conditioned space.
2. Pull out tests are required prior to construction.
3. If SA Base is used, ambient temperatures must be 50° F and rising.
4. Two interplies of approved Base Sheet are required.
5. Flashings are to be one layer of Cap Sheet installed in accordance with Mule-Hide Standard Details.

PRODUCTS NOT SUPPLIED BY MULE-HIDE PRODUCTS ARE NOT COVERED UNDER THE MULE-HIDE WARRANTY

PLEASE CONSULT THE MULE-HIDE WEBSITE FOR THE MOST CURRENT INFORMATION AT WWW.MULEHIDE.COM