


NOTES:

1. ON MECHANICALLY FASTENED SYSTEMS, MH HDP OR EHD FASTENERS AND 2.4" SEAM PLATES ARE REQUIRED AS A MINIMUM. CONTACT MULE-HIDE FOR TPO REINFORCED MEMBRANE FASTENING CRITERIA AND PROPER FASTENERS FOR EACH DECK TYPE.
2. WHEN COUNTERFLASHING IS USED FOR TERMINATION, BONDING ADHESIVE IS NOT REQUIRED WHEN FLASHING HEIGHT IS 12" OR LESS. WHEN COPING OR TERMINATION BAR IS USED, ADHESIVE MAY BE ELIMINATED WHEN FLASHING HEIGHT IS 18" OR LESS.
3. RUSS PRODUCTS CANNOT BE USED ON FLEECEBACK OR SELF ADHERING MEMBRANES.

CREASE MEMBRANE AT ANGLE
CHANGE TO LIMIT BRIDGING TO
 $\frac{3}{4}$ " MAX

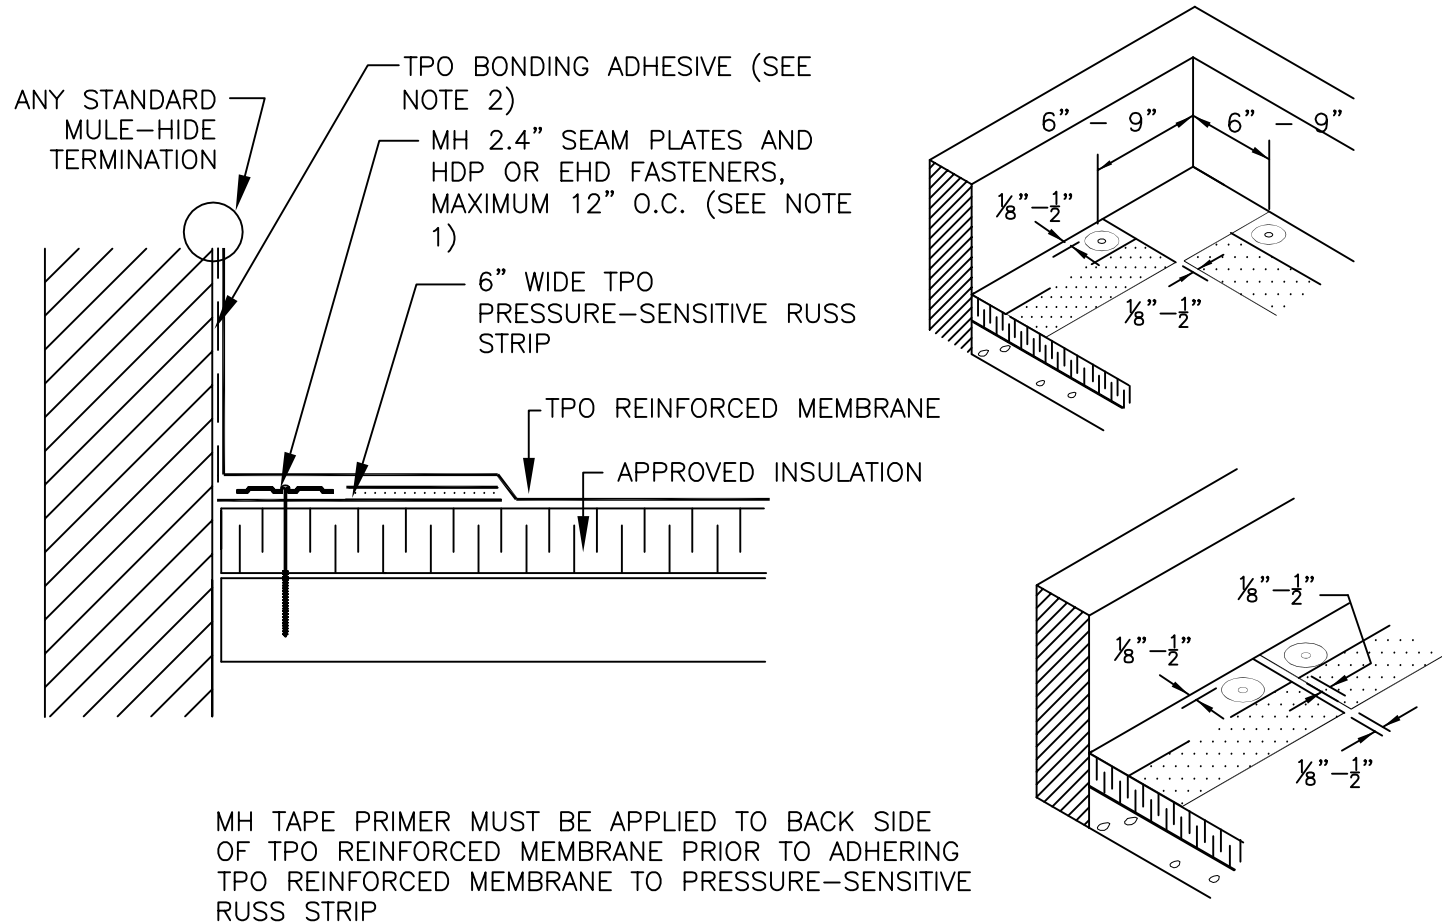

MH TAPE PRIMER MUST BE APPLIED TO BACK SIDE OF TPO REINFORCED MEMBRANE PRIOR TO ADHERING TPO REINFORCED MEMBRANE TO PRESSURE-SENSITIVE RUSS STRIP

**MULE-HIDE
PRODUCTS CO., INC.**

**BASE ATTACHMENT
USING 6" RUSS
SYSTEMS:
ALL TPO SYSTEMS
EXCEPT FLEECEBACK AND SELF ADHERING**

DETAIL NO.:
MHT-UN-305B

REVISION DATE: 10/2013