



CREASE MEMBRANE AT ANGLE CHANGE TO  
LIMIT BRIDGING TO 3/4" MAXIMUM

INSTALL OUTSIDE  
UNIVERSAL CORNERS

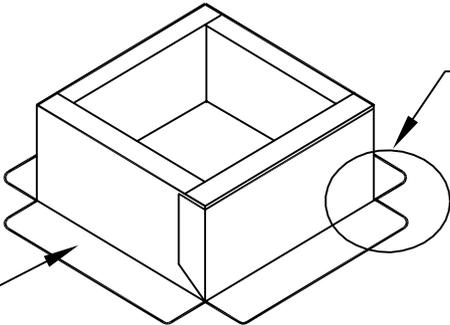

USE ONE CONTINUOUS SHEET  
OF TPO REINFORCED  
MEMBRANE TO WRAP AROUND  
CURB

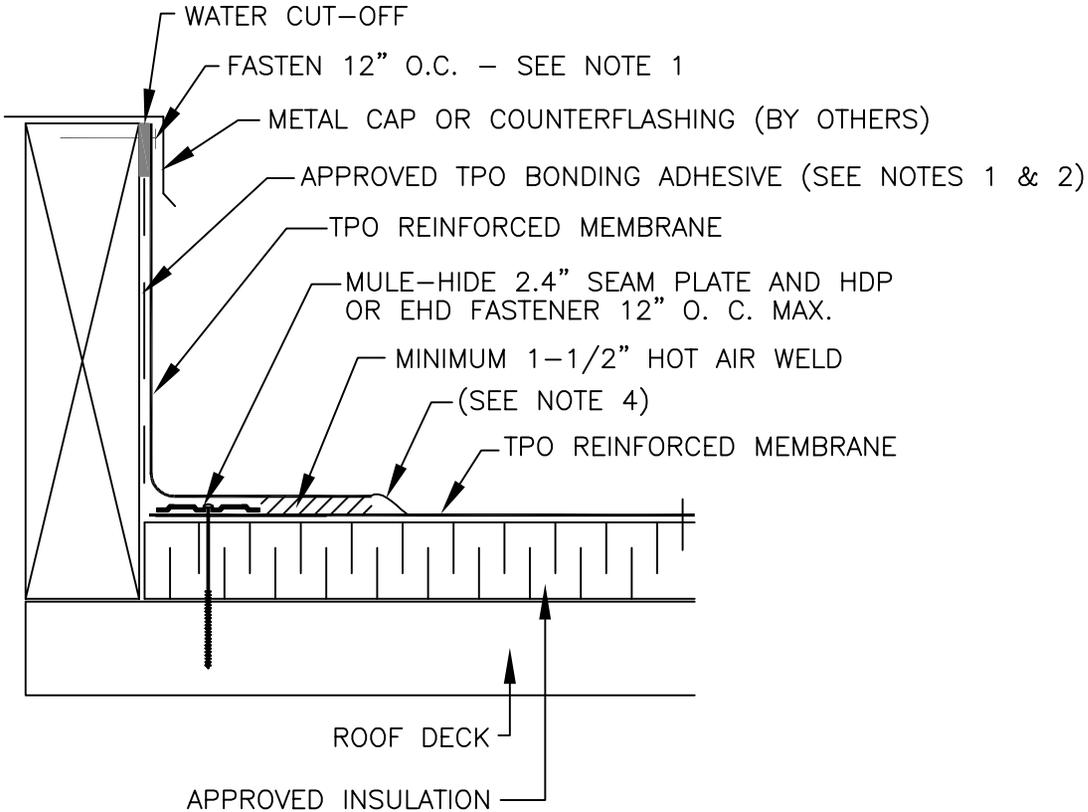

NOTES:

1. TPO REINFORCED MEMBRANE FASTENED APPROXIMATELY 12" ON CENTER. IF FASTENER PENETRATES METAL COUNTERFLASHING, USE NEOPRENE WASHER OR APPLY WATER CUT-OFF MASTIC UNDER COUNTERFLASHING OR CAULK FASTENER HEAD.
2. APPROXIMATELY 1/8" BEAD OF CUT-EDGE SEALANT IS REQUIRED ON CUT EDGES OF TPO REINFORCED MEMBRANE.

NOTE:  
THIS DETAIL IS NOT ACCEPTABLE FOR USE  
IN A 20-YEAR WARRANTED SYSTEM.

<b>MULE-HIDE PRODUCTS CO., INC.</b>	<b>CURB FLASHING</b>	<b>DETAIL NO.:</b> <b>MHT-UN-503</b> REVISION DATE: 10/2013
	<b>SYSTEMS:</b> <b>ALL TPO SYSTEMS</b>	