

FIGURE 1  
INSTALLATION USING 12" O.C.  
BEADS ON 4' X 4' BOARDS

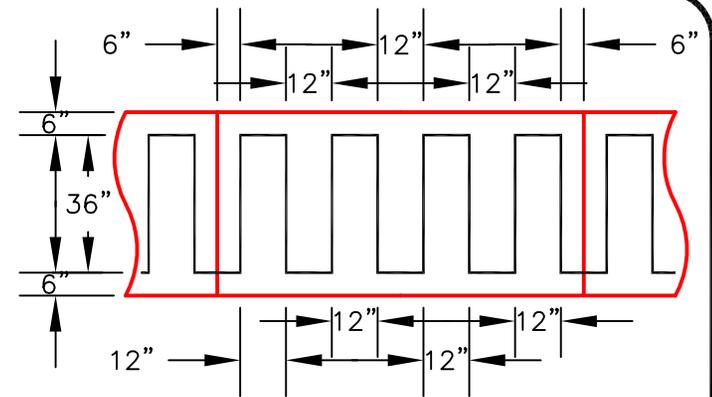


FIGURE 3  
INSTALLATION USING 12" O.C.  
BEADS ON 4' X 8' BOARDS

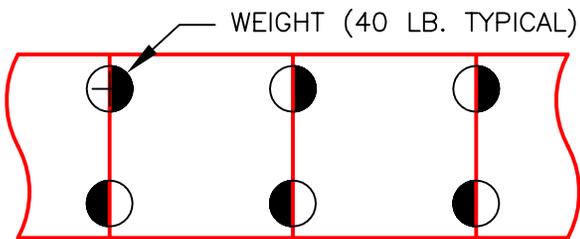


FIGURE 2  
RECOMMENDED WEIGHT  
PLACEMENT ON 4' X 4' BOARDS

INSULATION TYPE	MAXIMUM BOARD SIZE
HIGH DENSITY WOOD FIBERBOARD	4' X 4'
POLYISOCYANURATE	4' X 4'
EXTRUDED POLYSTYRENE (XPS)	2' X 8'
EXPANDED POLYSTYRENE (EPS)	4' X 4'
DENS DECK PRIME	4' X 8'
SECUROCK	4' X 8'
ORIENTED STRAND BOARD (OSB)	4' X 8'

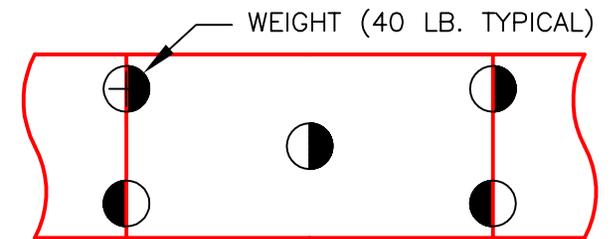


FIGURE 4  
RECOMMENDED WEIGHT  
PLACEMENT ON 4' X 8' BOARDS

COVERAGE RATES	CARTRIDGES*	TANKS
3/4" BEADS 12" O.C.	600 S.F.	3,000 S.F.
3/4" BEADS 6" O.C.	300 S.F.	1,500 S.F.
3/4" BEADS 4" O.C.	200 S.F.	1,000 S.F.

\* COVERAGE RATES FOR CARTRIDGES ARE BASED ON CARTON QUANTITIES, 4 CARTRIDGES PER CARTON

**MULE-HIDE  
PRODUCTS CO., INC.**

**HELIX FOAM ADHESIVE  
12" RIBBON PATTERN  
SYSTEMS:  
ALL SYSTEMS**

**DETAIL NO.:**  
**MHHA-UN-12**  
REVISION DATE: 03/2017