

DECK TYPE	MINIMUM DECK THICKNESS	FASTENER	THERMOPLASTIC COATED PLATE
STEEL	22 GAUGE	MULE-HIDE EHD FASTENER	3-1/8" DIAMETER
PLYWOOD	15/32"	MULE-HIDE EHD FASTENER	3-1/8" DIAMETER


NOTE: AT IN-FILL MINOR PIECES, USE MIN. 2 FASTENERS.

FIELD ZONE PERIMETER ZONE

SEE B FOR PERIMETER ZONE FASTENER PATTERN

MINIMUM WDT FOR PERIMETER AND CORNER ZONE IS 8'-0". BUT IF A PORTION OF A BOARD EXTENDS INTO ANOTHER ZONE, THE ENTIRE BOARD IS FASTENED AT THE HIGHER RATE, AS DEPICTED

SEE A FOR FIELD ZONE FASTENER PATTERN

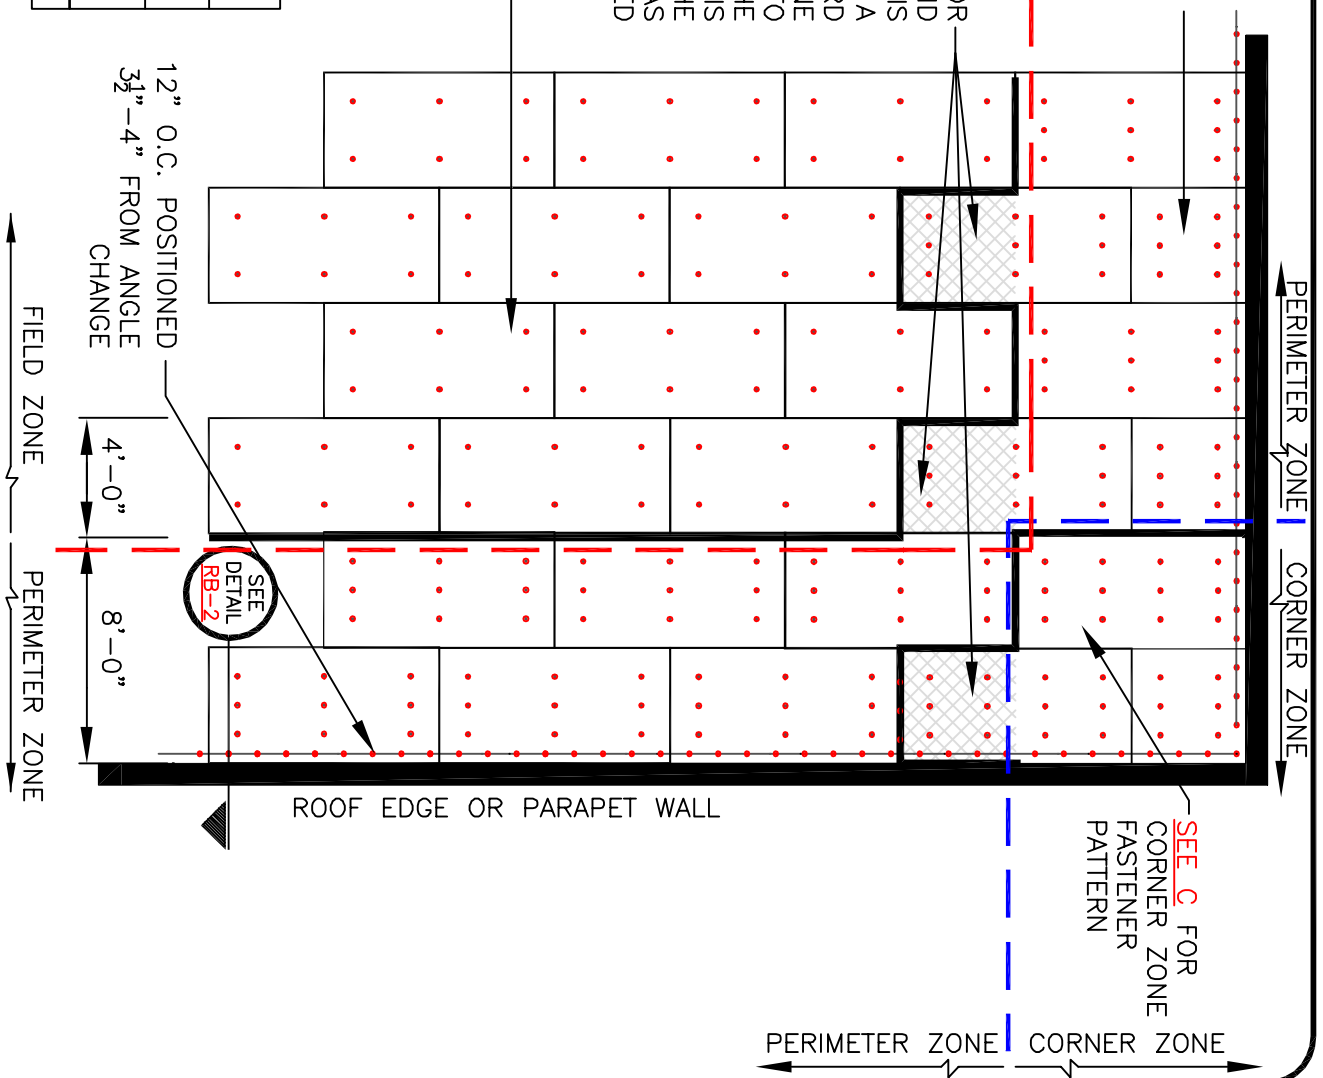

MULE-HIDE PRODUCTS CO., INC.

RHINO BOND FASTENING REQUIREMENTS

SYSTEMS: TPO MECHANICALLY ATTACHED

DETAIL NO.: MHT-RB1

REVISION DATE: 01/2013