


NOTES:

1. DETAILS TO BE USED IN CONJUNCTION WITH STANDARD GUIDE SPECIFICATIONS CONTAINING REQUIREMENTS FOR NAILERS, INSULATION, SLIPSHEETS, ETC.
2. PVC EDGE SEALANT IS REQUIRED ON ALL CUT OR NON-ENCAPSULATED EDGES OF REINFORCED MEMBRANE. THIS INCLUDES FACTORY CUT MEMBRANE.
3. REFER TO SPECIFICATIONS FOR ACCEPTABLE FASTENERS FOR OTHER DECK TYPES. IF A FACTORY MUTUAL RATING IS REQUIRED, REFER TO MULE-HIDE CODE APPROVAL GUIDE FOR SPECIFIC REQUIREMENTS.
4. POSITION 2.4" SEAM PLATES BEYOND NON-REINFORCED ENCAPSULATED EDGE.
5. REFER TO MULE-HIDE UPLIFT RATINGS FOR APPROPRIATE FASTENER SIZE, AND SPACING.

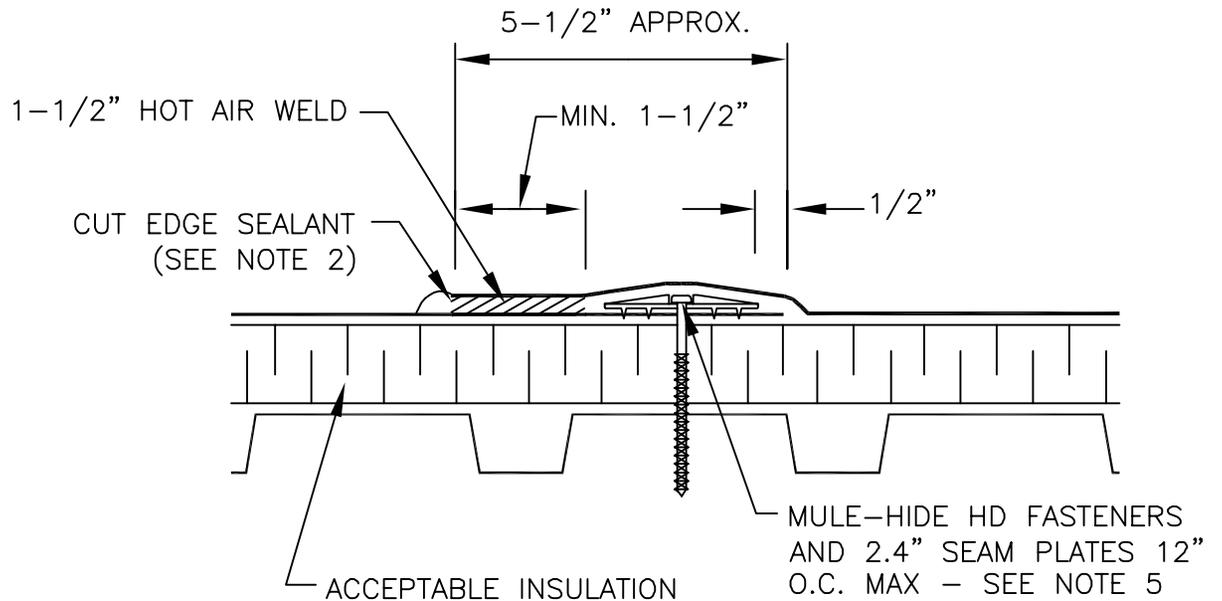

**MULE-HIDE  
PRODUCTS CO., INC.  
2010**

**LAP CROSS SECTION  
SYSTEMS:  
MECHANICALLY FASTENED PVC**

**DETAIL NO:  
MHP-112**