


NOTES:

1. WHEN USING MULE-HIDE ALL-PURPOSE BAR UNDER COUNTERFLASHING TO TERMINATE WALL FLASHING, TPO BONDING ADHESIVE MAY BE ELIMINATED WHEN FLASHING HEIGHT IS 18" OR LESS.
2. FLASHING SHALL BE A MINIMUM OF 8" HIGH WHEN POSSIBLE. REUSE OF EXISTING COUNTERFLASHING IS ACCEPTABLE IF ABOVE MAXIMUM FLOOD LEVEL AND METAL IS IN GOOD CONDITION. FUNCTIONAL WEEP HOLES MUST NOT BE BLOCKED.
3. APPROXIMATELY 1/8" DIAMETER BEAD OF CUT-EDGE SEALANT IS REQUIRED ON CUT EDGES OF TPO REINFORCED MEMBRANE.

NOTE:

IF SHEETMETAL IS TO BE INCLUDED IN THE WARRANTY, CONTRACTOR MUST USE MULE-HIDE METAL PRODUCTS. REFER TO DETAILS MHSM-6130, MHSM-6145, OR MHSM-6146.

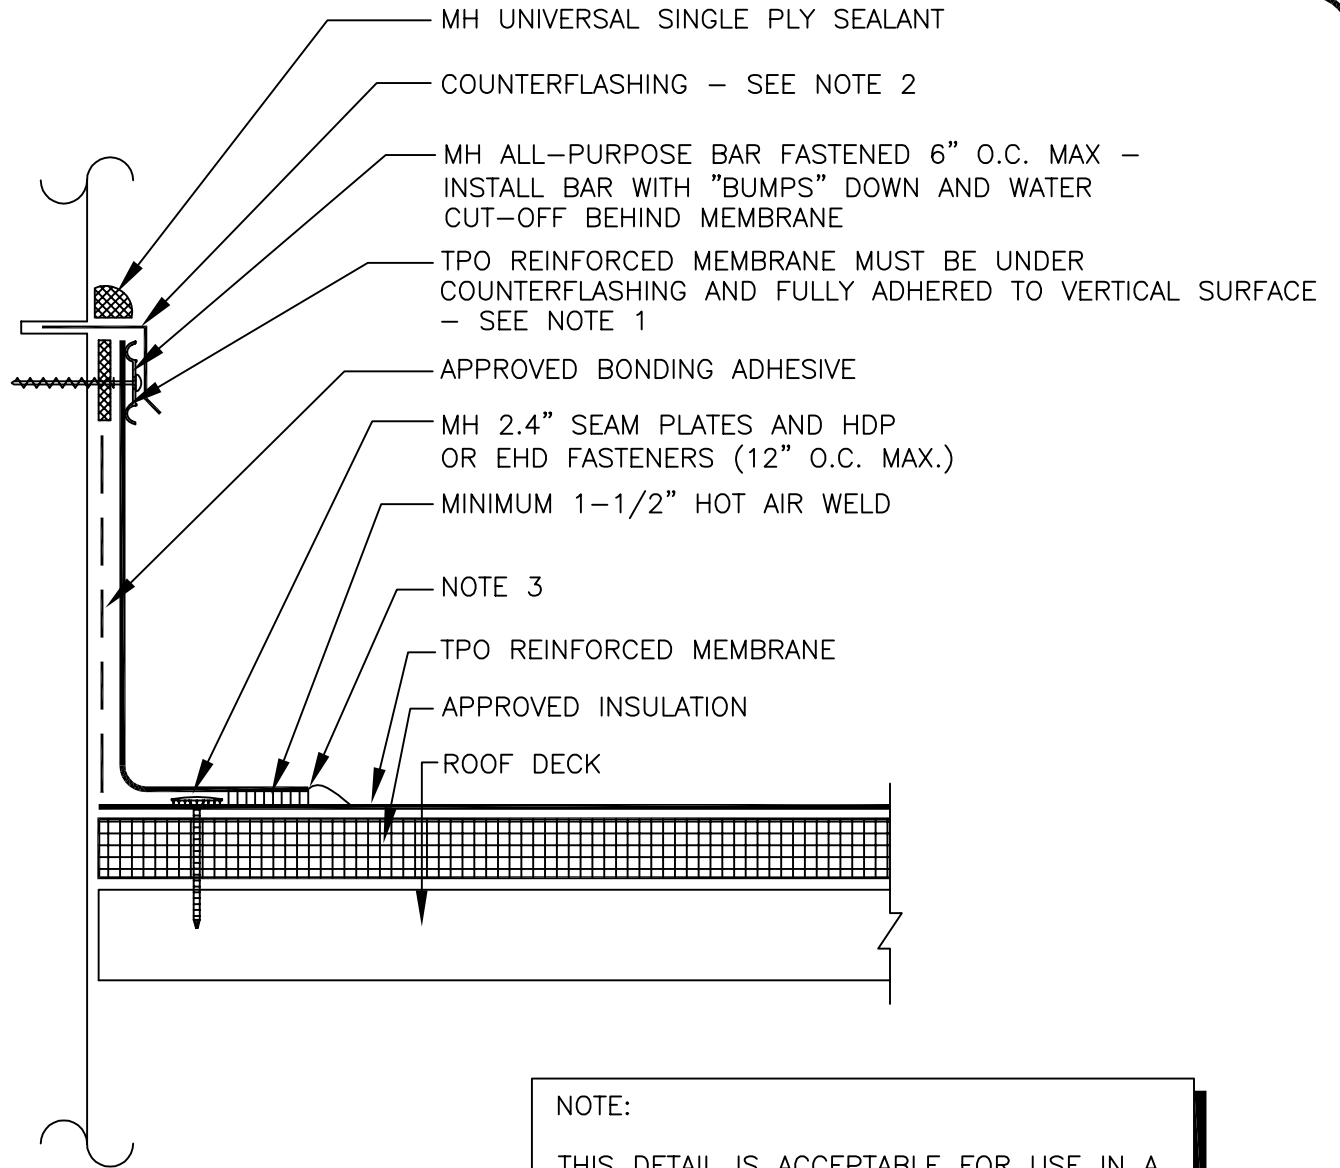

NOTE:

THIS DETAIL IS ACCEPTABLE FOR USE IN A 20-YEAR WARRANTED SYSTEM

**MULE-HIDE
PRODUCTS CO., INC.**

**WALL FLASHING
WITH COUNTERFLASHING
SYSTEMS:
ALL TPO SYSTEMS**

DETAIL NO.:
MHT-UN-310

REVISION DATE: 10/2013