

SA-SBS Cap Sheet

Self-Adhering SBS Membrane

The Right Choice for Low-Slope Roofing Products

800-786-1492 • mulehide.com



Rugged • Time-Tested • Weather-Tested

SA-SBS CAP SHEET & SA-SBS CAP SHEET FR

SA-SBS Cap Sheet & SA-SBS Cap Sheet FR are a premium self-adhering polyester reinforced modified bitumen membrane manufactured to meet the toughest code requirements of the industry. SA-SBS Cap Sheet & SA-SBS Cap Sheet FR are manufactured using Adeso® dual-compound technology, whereby the membrane consists of a Styrene Butadiene Styrene (SBS) modified asphalt compound on top and a pressure sensitive adhesive compound on the bottom. The adhesive is covered with a split release liner. SA-SBS Cap Sheet & SA-SBS Cap Sheet FR are finished with granules on the top surface and features SEALLap® ULTRA side lap with self-adhesive compound for an instant bond, tested stronger than all other application methods and FASTLap®, granule free end lap. Each of these patented features provide for greater ease of application as well as improved long-term performance. SA-SBS Cap Sheet & SA-SBS Cap Sheet FR are also used as a flashing membrane in all applicable specifications.

BASIC USES


SA-SBS Cap Sheet & SA-SBS Cap Sheet FR membranes are designed for applications where the use of hot asphalt, cold process adhesive, or a propane torch is undesirable. Applications include new roofing, recover (retrofit) and BUR repairs. This system must be installed over an acceptable base sheet, roof insulation, or other suitable substrate. See the MuleHide Self-Adhered Modified Bitumen Application Guidelines for complete specifications and details.

Description	Thickness	Coverage	Weight	Carton
32' 10" x 39-3/8" (10m x 1m)	3.5mm (140mils)	100 ft ²	84 lbs.	1 Sq. Roll

SA-SBS CAP SHEET	
Product Code	Color
06MHSASBU	Buff
06MHSASBK	Black
06MHSASCH	Chestnut
06MHSASSL	Slate
06MHSASOA	Oak
06MHSASHB	Heather Blend
06MHSASRB	Red Blend
06MHSASPG	Pine Green
06MHSASWW	Weatherwood
06MHSASWH	White

SA-SBS CAP SHEET FR	
Product Code	Color
06MHSASFBU	Buff
06MHSASFBK	Black
06MHSASFCH	Chestnut
06MHSASFSL	Slate
06MHSASFOA	Oak
06MHSASHB	Heather Blend
06MHSASFRB	Red Blend
06MHSASFPG	Pine Green
06MHSASFWW	Weatherwood
06MHSASFWH	White

MORE INFO

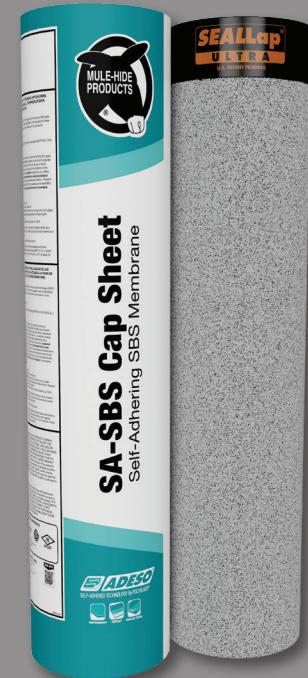

D6164 TYPE I, GRADE G
D1970

The information herein should not be considered all-inclusive and should always be accompanied by a review of the MuleHide specifications and guidelines and good application practices.

This information herein is based upon data and knowledge considered to be true and accurate at the time of printing and is provided for the reader's consideration, investigation and verification. No statement made by anyone may supersede this information, except when done in writing by Mule-Hide Products Co., Inc. ("MuleHide"). MuleHide does not warrant any results to be obtained. Statements concerning possible use of MuleHide products are made without knowledge of your particular roof and such an application may not be fit for your particular purpose. MULEHIDE DISCLAIMS ALL WARRANTIES, INCLUDING THE IMPLIED WARRANTY OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, except written warranties attached to MuleHide products and written warranties signed by an officer of MuleHide.

Visit the MuleHide website at www.mulehide.com prior to any installation for updated technical specifications and details. MuleHide is a U.S. registered trademark. All rights reserved. REV 1 12/24

Various code approvals are available including: Factory Mutual, Underwriters Laboratories, Miami-Dade, Florida Product Approval, ICC-ESR and Texas Department of Insurance. Contact MuleHide Technical Department for specific ratings.