

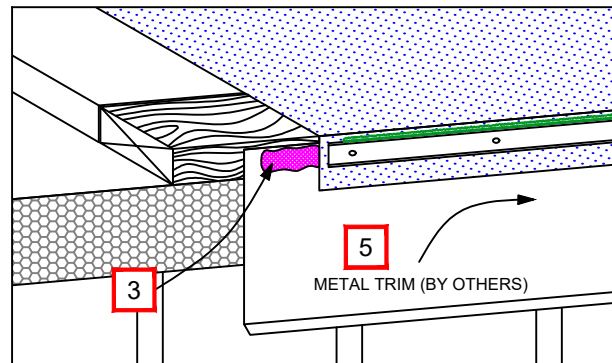


- 1 WOOD NAILERS (BY OTHERS) MUST BE SECURELY FASTENED. FACTORY MUTUAL'S PROPERTY LOSS PREVENTION DATA SHEET 1-49 IS A REFERENCE FOR SECUREMENT CRITERIA.
- 2 TOP WOOD NAILER SHALL BE SUFFICIENT THICKNESS TO PERMIT PROPER ATTACHMENT OF EDGE METAL FASTENERS.
- 3 WHEN FLEECE BACK MEMBRANE IS USED IN OPTION A, THE SELVAGE EDGE MUST BE IN CONTACT W/ THE WATER CUT-OFF MASTIC, OR AN APPROXIMATE 6" WIDE STRIP OF TPO REINFORCED (NON-FLEECE) MEMBRANE MUST BE WELDED AT ROOF EDGE TO BE PLACED IN CONTACT WITH THE WATER CUT-OFF MASTIC. REFER TO DETAIL TP-TM-C610 OR TP-TM-C611
- 4 ENSURE PROPER DRAINAGE IS NOT RESTRICTED WHEN CONSIDERING THE USE OF GRAVEL STOP OR FASCIA EDGE METAL
- 5 SLIP METAL COUNTER FLASHING / METAL TRIM IS REQUIRED AS SHOWN WHEN INSTALLING OPTION A. THE METAL TRIM MUST EXTEND BELOW THE INSULATION FILLER.
- 6 SLIP METAL COUNTER FLASHING / METAL TRIM IS REQUIRED AS SHOWN IF CLEAT OR FASCIA METAL DO NOT EXTEND BELOW THE INSULATION FILLER.
- 7 MECHANICALLY ATTACHED METAL RETROFIT SYSTEMS W/ FIELD MEMBRANE ATTACHED TO PURLINS ARE APPROVED FOR WARRANTIES UP TO 30 YEARS. REFER TO DETAILS TP-LO-C1108, TP-LO-C1109, TP-LO-C1110. ALL OTHER METAL RETROFIT SYSTEM OPTIONS ARE LIMITED TO 20 YEAR MAX.

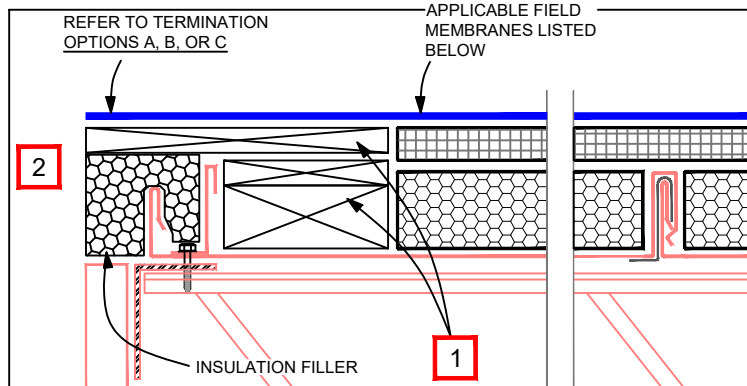


OPTION A - MULEHIDE AP BAR OR ALUMINUM BAR
W/ 1-3/4" FASCIA COVER COMBINATION

REFER TO DETAIL TP-TM-C610 OR T-TM-C611 FOR
ADDITIONAL REQUIREMENTS

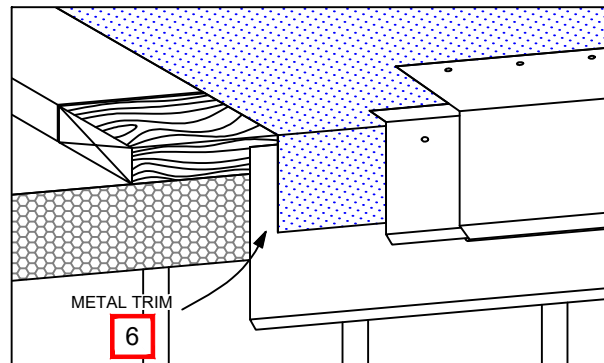

OPTION B - DRIP EDGE OR GRAVEL STOP 4

REFER TO DRIP EDGE DETAILS FOR OPTIONS, AND
FOR ADDITIONAL INSTALLATION AND FLASHING
REQUIREMENTS

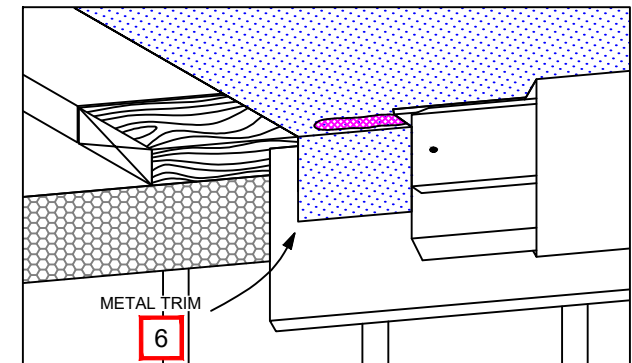

OPTION C - FASCIA EDGE METAL 4

REFER TO DETAIL TP-EM-C116 OR TP-EM-C117 FOR
ADDITIONAL INSTALLATION AND FLASHING
REQUIREMENTS

APPLICABLE FIELD MEMBRANE (AND SYSTEMS)
TPO REINFORCED (ADHERED) (MECHANICALLY ATTACHED)
TPO FLEECE BACK (ADHERED)
TPO SELF-ADHERING (ADHERED)

MULEHIDE

TPO METAL RETROFIT: RAKE CONDITION AND OPTIONS
WHEN RAKE TRIM REMOVED

WHEN THE SYSTEM TYPE AND PROJECT DESIGN PERMIT, THIS DETAIL IS
ACCEPTABLE FOR : **MAXIMUM 30 YEAR WARRANTY** 7

DETAIL NO.:
TP-EM-C126

REVISION DATE: 8/24/2026