


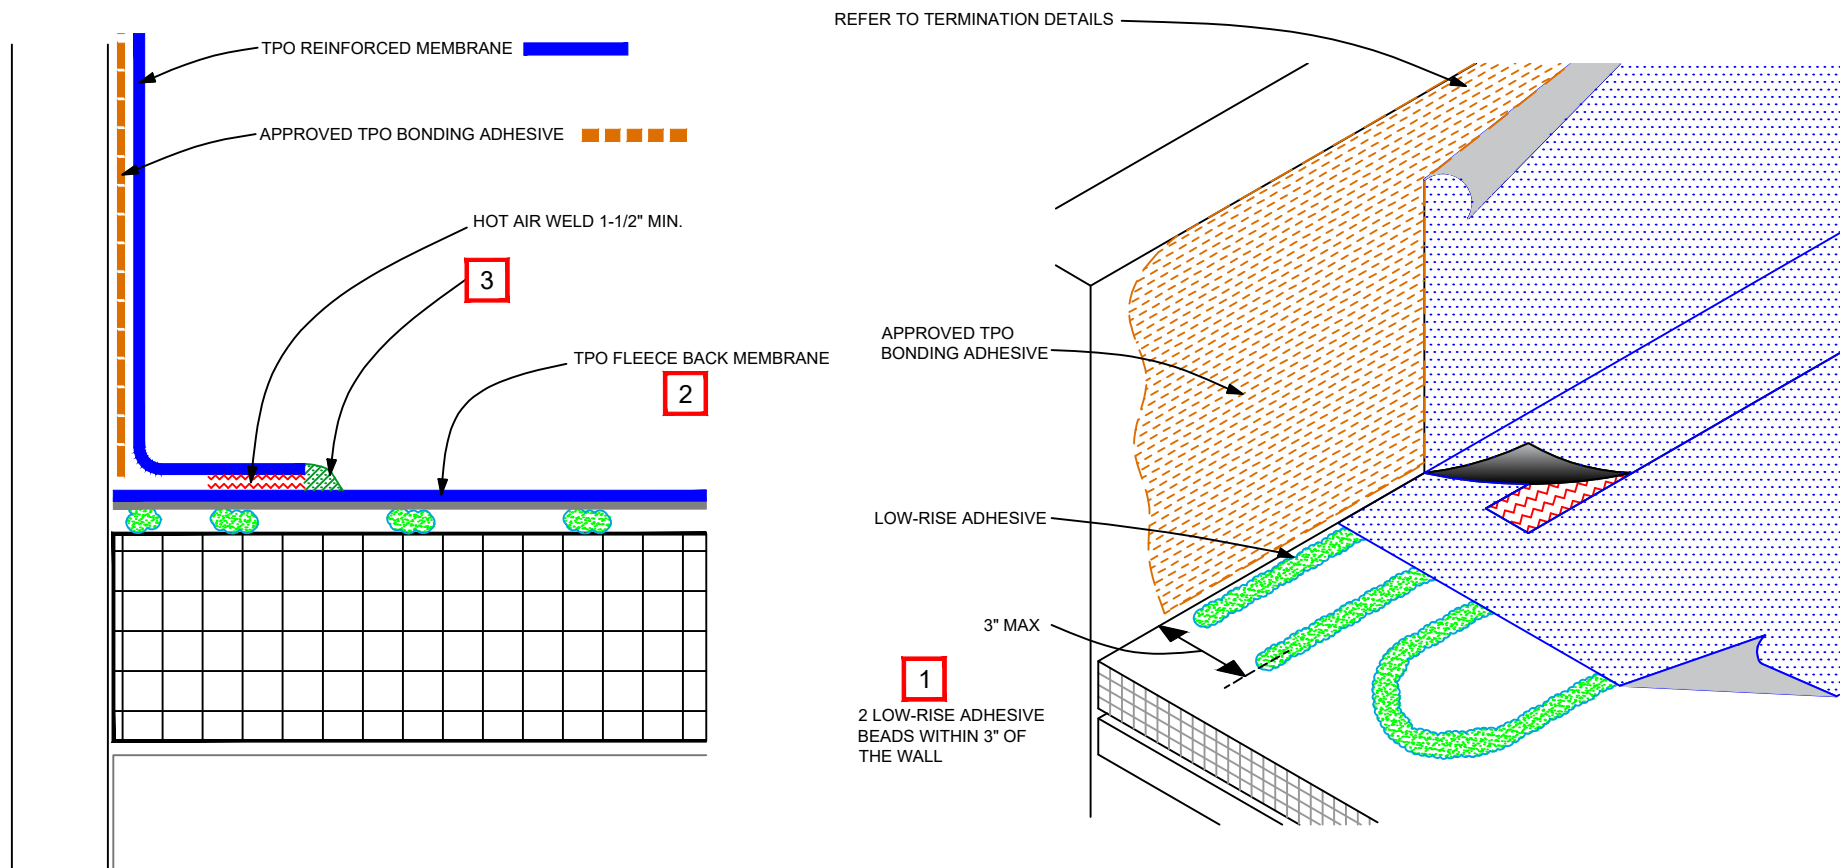

- 1** "MECHANICAL" BASE ATTACHMENT IS REQUIRED WITH ANY OF THE FOLLOWING:
- WARRANTIES EXCEEDING 20 YEARS
 - WIND SPEED WARRANTIES EXCEEDING 90 MPH
 - CONTROL OR EXPANSION JOINTS
 - WHEN FLEECE BACK MEMBRANE IS INSTALLED DIRECTLY OVER AN EXISTING ROOF MEMBRANE

- 2** DETAIL NOT APPLICABLE WITH FLEECE BACK "PLUS" MEMBRANE

- 3** 1/8" BEAD OF CUT-EDGE SEALANT IS REQUIRED ON CUT EDGES OF REINFORCED TPO MEMBRANES

APPLICABLE FIELD MEMBRANE (AND SYSTEMS)
TPO FLEECE BACK (ADHERED)

MULEHIDE

TPO FB CURB OR WALL ATTACHMENT W/ LOW RISE:
SEPARATE WALL FLASHING

WHEN THE SYSTEM TYPE AND PROJECT DESIGN PERMIT, THIS DETAIL IS
ACCEPTABLE FOR : **MAXIMUM 20 YEAR WARRANTY**

DETAIL NO.:
TP-WF-A212

REVISION DATE: 8/24/2026